

Modem & Wi-Fi Router Self-Connect Guide

CODA-45 & GigaSpire BLAST u6



Wi-Fi Modem Self-Connect Guide

What's in the kit.





(Hitron CODA-45)


(Calix GigaSpire)

(Specific for each)

Cord



- Connect the supplied coaxial cable to the wall plate.
- Connect the other end of the coax cable to the modem.
- Tighten connectors rotating clockwise until securely fastened.

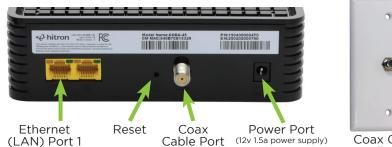

Coax Cable Wall Plate

Power on Your Modem

- Plug in the supplied power cord to the modem.
- Plug the other end of the power cord into the wall.
- The lights should come on.

Confirm Modem is Online

• Wait until 2 lights are solid blue. This may take up to 10 minutes.





Connecting Your GigaSpire BLAST Wi-Fi Router


- Plug in the power adapter shipped with the GigaSpire to an available wall socket and attach the other end to the GigaSpire's power port.
- Connect one end of the supplied Ethernet cable to the Yellow LAN Port 1 on the back of the CODA-45 internet modem and the other end of the cable to the WAN port on the back of the GigaSpire.




 Once the light is solid blue, and you are able to see the WCG-***** SSID with your Wi-Fi devices, initial setup is complete.

Note: The SSID (network name) of your new GigaSpire will update from CXNK-******* to WCG-******* when the system has updated. The password remains the default setting; as found on the bottom of your GigaSpire **beside 'WPA Key'**.



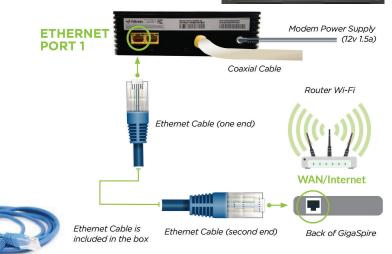



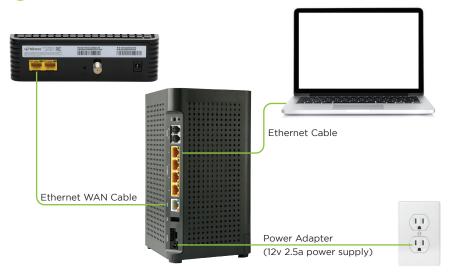

- Connect CAT5 or better cabling to the yellow LAN Ethernet (RJ-45) ports for direct-attached devices.
- Secure all subscriber service wiring as appropriate.


6 Get the My Westman Wi-Fi App to set up Wi-Fi

• Please refer to My Westman Wi-Fi User Guide.

We're here to help.



Please visit **support.westmancom.com** and search for "**self-connect**" for more info, or call our support team at 204.717.2802 or 1.800.665.3337.



204.725.4300 1.800.665.3337 westmancom.com